


● DS/J41/61H-16~25 C ● DS/J41/61Y-16~25 I/P/R

● DS/J41/61H-40~100 C ● DS/J41/61Y-40~100 I/P/R

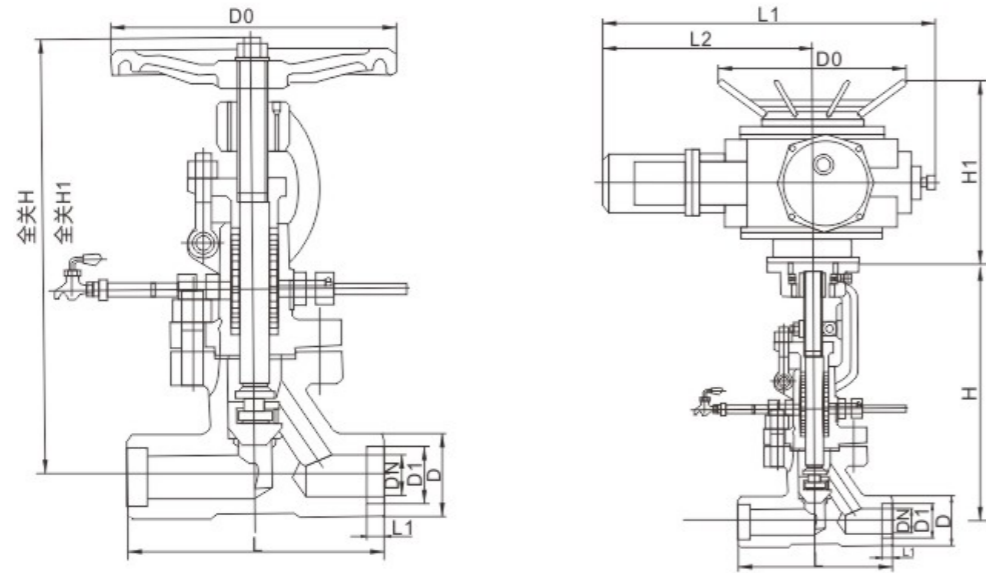

主要外形尺寸和连接尺寸

单位:mm

DN	L1	L2	D	D1	D2	b	f	Z-Φd	B	A	A1	H	H1	D0
PN16														
15	130	140	95	65	45	14	2	4-14	12	18	36	245	260	120
20	150	152	105	75	55	14	2	4-14	18	25	44	265	285	140
25	160	165	115	85	65	14	2	4-14	25	32	44	270	295	160
32	180	184	135	100	78	16	2	4-18	31	38	48	285	315	180
40	200	203	145	110	85	16	3	4-18	38	45	55	300	330	200
50	230	229	160	125	100	16	3	4-18	49	57	64	355	390	240
65	290	279	180	145	120	18	3	4-18	66	73	82	415	455	280
80	310	318	195	160	135	20	3	8-18	78	89	94	425	470	280
100	350	368	215	180	155	20	3	8-18	96	108	117	470	520	320
125	400		245	210	185	22	3	8-18	121	133	144	500	555	360
150	480	470	280	240	210	24	3	8-23	146	159	175	570	650	400
200	600	597	335	295	265	26	3	12-23	202	219	232	680	770	400
PN25														
15	130	152	95	65	45	16	2	4-14	12	18	36	245	260	120
20	150	178	105	75	55	16	2	4-14	18	25	44	265	285	140
25	160	203	115	85	65	16	2	4-14	25	32	44	270	295	160
32	180	216	135	100	78	18	2	4-18	31	38	48	285	315	180
40	200	229	145	110	85	18	3	4-18	38	45	55	300	330	200
50	230	267	160	125	100	20	3	4-18	49	57	64	355	390	240
65	290	292	180	145	120	22	3	8-18	66	73	82	415	455	280
80	310	318	195	160	135	22	3	8-18	78	89	94	425	470	280
100	350	356	230	190	160	24	3	8-23	96	108	117	470	520	320
125	400	400	270	220	188	28	3	8-25	121	133	144	500	555	360
150	480	444	300	250	218	30	3	8-25	146	159	175	570	650	400
200	600	559	360	310	278	34	3	12-25	202	219	232	680	770	400

单位:mm

主要外形尺寸和连接尺寸

DN	L1	L2	D	D1	D2	D6	b	f2	f	Z-Φd	B	A	A1	H	H1	D0
PN40																
15	130	152	95	65	45	40	16	4	2	4-14	12	18	36	245	260	120
20	150	178	105	75	55	51	16	4	2	4-14	18	25	44	255	285	140
25	160	203	115	85	65	58	16	4	2	4-14	25	32	44	270	295	160
32	180	216	135	100	78	66	18	4	2	4-18	31	38	48	285	300	180
40	200	229	145	110	85	76	18	4	3	4-18	38	45	55	300	340	200
50	230	267	160	125	100	88	20	4	3	4-18	48	57	64	355	390	240
65	290	292	180	145	120	110	22	4	3	8-18	66	73	82	410	455	280
80	310	318	195	160	135	121	24	4	3	8-18	78	89	94	425	470	320
100	350	356	230	190	160	150	26	4.5	3	8-23	96	108	117	470	530	360
125	400	400	270	220	188	176	28	4.5	3	8-25	120	133	144	500	570	400
150	480	444	300	250	218	204	30	4.5	3	8-25	145	159	175	570	650	400
200	600	559	375	320	282	260	38	4.5	3	12-30	200	219	232	690	780	400
PN63																
15	170	165	105	75	55	40	16	4	2	4-14	12	18	44	245	260	140
20	190	190	125	90	68	51	16	4	2	4-14	18	25	44	270	290	160
25	210	216	135	100	78	58	16	4	2	4-14	25	32	48	290	315	180
32	230	229	150	110	82	66	18	4	2	4-18	31	38	50	330	360	200
40	260	241	165	125	95	76	18	4	3	4-18	38	45	55	375	405	240
50	300	292	175	135	105	88	20	4	3	4-18	48	57	66	405	440	280
65	340	330	200	160	130	110	22	4	3	8-18	66	73	82	435	465	320
80	380	356	210	170	140	121	24	4	3	8-18	78	89	96	470	515	360
100	430	406	250	200	168	150	26	4.5	3	8-23	96	108	117	540	590	400
125	500	457	295	240	202	176	28	4.5	3	8-25	120	133	150	720	795	400
150	550	495	340	280	240	204	30	4.5	3	8-25	145	159	175	840	920	450
PN100																
15	170	165	105	75	55	40	20	4	2	4-14	12	18	44	245	260	140
20	190	190	125	90	68	51	22	4	2	4-18	18	25	48	270	290	160
25	210	216	135	100	78	58	24	4	2	4-18	25	32	48	290	315	180
32	230	229	150	110	82	66	24	4	2	4-23	31	38	55	330	360	200
40	260	241	165	125	95	76	26	4	3	4-23	37	45	60	375	405	240
50	300	292	195	145	112	88	28	4	3	4-25	45	57	66	405	440	280
65	340	330	220	170	138	110	32	4	3	8-25	62	73	90	435	465	320
80	380	356	230	180	148	121	34	4	3	8-25	75	89	96	470	515	400
100	430	432	265	210	172	150	38	4.5	3	8-30	92	108	117	540	590	450
125	500	508	310	250	210	176	42	4.5	3	8-34	112	133	150	720	795	500
150	550	559	350	290	250	204	46	4.5	3	12-34	136	159	175	840	920	550